

Ultra high purity transducer, Ex n Models WUC-10, WUC-15 and WUC-16

WIKAI data sheet PE 87.06



Applications

- Semiconductor, flat panel display and photovoltaic industry
- Ultrapure media and special gas systems (gas sticks, gas panels, bulk gas supply, tank farm installations)

Special features

- Compact design
- ATEX zone 2 approval
- Ingress protection IP 67 (NEMA 4) with "side access" zero point potentiometer
- Excellent EMC stability
- Active temperature compensation

Description

Compact

The space-saving design of the model WUC-1X provides greater free space in plants and installations.

The WUC-15 and 16 series transducers are notable for their excellent self-draining characteristics. The special sensor connection design eliminates the influence on the sensor signal through loads on the process connections or weld seams.

Versatile

The high IP 67 ingress protection also enables them to be used under harsh conditions on tank farm and speciality gas installations outdoors.

This series of instruments has also been developed for use in Ex zone 2. The T6 temperature class classification ensures that even measurements of media with low self-ignition temperatures, such as PH3 (phosphine), do not present a problem.



Fig. left model WUC-10, single end
Fig. centre model WUC-15, flow through
Fig. right model WUC-16, modular surface mount

Reliable

With cyclic pressure rinsing, high gas throttling values (Joule-Thompson effect) and external operation, high temperature fluctuations can occur. The active temperature compensation detects these changes and minimises their influence. Thus stable measurement is ensured.

Through the sealed "Side-Access" zero point adjustment, the high IP 67 ingress protection is permanently maintained. Simple handling and protection from unintentional adjustment is ensured.

The materials 316L VIM VAR are used for all wetted parts and the special thin film sensors are from 2.4711 / UNSR 30003. All wetted parts are electropolished and cleaned with the latest processes before final assembly.

Through an individual examination of each transducer it is ensured that the required values for leak tightness, overpressure stability, accuracy and particles are met in accordance with the applicable SEMI™ standards.

Specifications

Models WUC-10, WUC-15, WUC-16

		WUC-10, WUC-15												
		WUC-16												
Measuring range	psi	14.5	25	60	100	160	250	350	500	1000	1500	2000	3000	5000
	bar	1	1.7	4	7	11	17	25	36	70	100	145	225	360
Overpressure safety ¹⁾	psi	120	120	120	210	320	500	750	1100	2100	3000	4200	6600	10000
Burst pressure ¹⁾	psi	1800	1800	1800	2200	2600	4800	6200	7400	8000	10500	10500	10500	10500
		Other measuring ranges and pressure units (e. g. MPa, kg/cm²) on request												
Measuring principle		Thin-film sensor												
Material														
■ Wetted parts														
- Process connection		316L VIM/VAR												
- Pressure sensor		2.4711 / UNSR 30003												
■ Case		304 SS												
Particle test		≤ 0.1 µm particle 0.1 ptc / ft³ per Semi E49.8												
Inboard helium leak test		< 1 x 10 ⁻⁹ mbar l/sec (atm STD cc/sec) per Semi F1												
Surface finish		Electropolished, typ. Ra ≤ 0.13 µm (Ra 5); max. Ra ≤ 0.18 µm (Ra 7) per Semi F19												
Dead volume	cm³	WUC-10 < 1.5, WUC-15 < 1, WUC-16 < 1												
Permissible media		Speciality gases, mist, liquids												
Power supply U ₊	DC	10 ... 30 V 14 ... 30 V with output 0 ... 5 V / 0 ... 10 V												
Output signal and permissible max. load R _A	R _A in ohm	4 ... 20 mA, 2-wire R _A ≤ (U ₊ – 10 V) / 0.02 A 0 ... 5 V, 3-wire R _A > 5k 0 ... 10 V, 3-wire R _A > 10k												
Power P _i	W	1												
Adjustability of zero point	% of span	-5 to +3.5 (via potentiometer) current output signal -2 to +5 (via potentiometer) voltage output signal												
Settling time (10 ... 90 %)	ms	≤ 300												
Insulation voltage	DC	500 V												
Accuracy	% of span	≤ 0.2 (≤ 0.4 with measuring ranges ≤ 2 bar) RSS (Root Sum Squares) per Semi draft # 3440 ≤ 0.5 ²⁾ (≤ 1.0 ²⁾ with measuring ranges ≤ 2 bar) per IEC 61298-2												
Non-linearity	% of span	≤ 0.1 (≤ 0.15 with measuring ranges ≤ 2 bar) (BFSL) per IEC 61298-2												
Hysteresis	% of span	≤ 0.14												
Non-repeatability	% of span	≤ 0.12												
Long-term stability	% of span	≤ 0.25 typ. / year (at reference conditions)												
Permissible temperature ranges		Non-Atex			T4			T5			T6			
■ Medium	°C	-20 ... +100			-20 ... +85			-20 ... +60			-20 ... +40			
■ Ambient	°C	-20 ... +85			-20 ... +85			-20 ... +60			-20 ... +40			
■ Storage	°C	-40 ... +100			-40 ... +100			-40 ... +100			-40 ... +100			
Rated temperature range	°C	-20 ... +80 (actively compensated)												
Temperature coefficients in rated temperature range (actively compensated):														
■ TC of zero point	% of span	≤ 0.1 / 10 K												
■ TC of span	% of span	≤ 0.15 / 10 K												
ROHS conformity		Yes (not with bayonet circular connector)												
CE conformity														
■ Pressure equipment directive		97/23/EC												
■ EMC directive		2004/108/EC, EN 61326 emission (group 1, class B) and immunity (industrial locations)												
■ ATEX directive		94/9/EC												
Ex protection	ATEX	Category 3G (for transducers with Ex mark)												
Ignition protection type		II 3G Ex nA nL IIC T4/T5/T6 X (for transducers with Ex mark)												
Ex protection	FM	Class I												
Ignition protection type		Self-protected energy-limited class I div 2 group A,B,C,D												
Production environment		Clean room class 5 per ISO 14644												
Packaging		Double-bagged per SEMI E49.6												

Specifications


Models WUC-10, WUC-15, WUC-16

Shock resistance	g	500 (1.5 ms) per IEC 60068-2-27
Vibration resistance		0.35 mm (10 - 58 Hz) / 5 g (58.1 - 2000 Hz) per EN 60068-2-6
Short-circuit resistance		S ₊ towards U ₋ (short-time)
Reverse polarity protection		U ₊ towards U ₋
Weight	kg	approx. 0.1

1) 1 psi = 0,069 bar

2) Including non-linearity, hysteresis, zero-point and full scale value deviations (corresponds to measured error per IEC 61298-2).
Calibrated in vertical mounting position with process connection facing downwards.

Output signal and permissible load

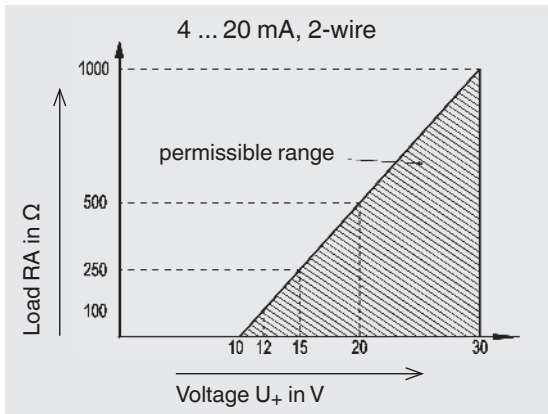

Current output (2-wire)

4 ... 20 mA: $R_A \leq (U_+ - 10 \text{ V}) / 0.02 \text{ A}$

Voltage output (3-wire)

0 ... 5 V: $R_A > 5 \text{ k}$

0 ... 10 V: $R_A > 10 \text{ k}$


with R_A in ohm and U_+ in VDC

Electrical connections




	Bayonet circular connector 4-pin	Circular connector M12 x 1, 4-pin	Cable outlet 1.5 m	Sub-D HD connector 15-pin
2-wire	U ₊ = A U ₋ = D	U ₊ = 1 U ₋ = 3	U ₊ = red U ₋ = black	U ₊ = 7 U ₋ = 5
3-wire	U ₊ = A U ₋ = D S ₊ = B	U ₊ = 1 U ₋ = 3 S ₊ = 4	U ₊ = red U ₋ = black S ₊ = brown	U ₊ = 7 U ₋ = 5 S ₊ = 2
Wire cross-section	-	-	0.22 mm ² (AWG 24)	-
Cable diameter	-	-	4.8 mm	-
Ingress protection per IEC 60529	IP 67 (NEMA 4) The stated ingress protection only applies when plugged-in using mating connectors that have the appropriate ingress protection.	IP 67 (NEMA 4)	IP 67 (NEMA 4)	IP 54

Dimensions in inch [mm] WUC-10

Electrical connections

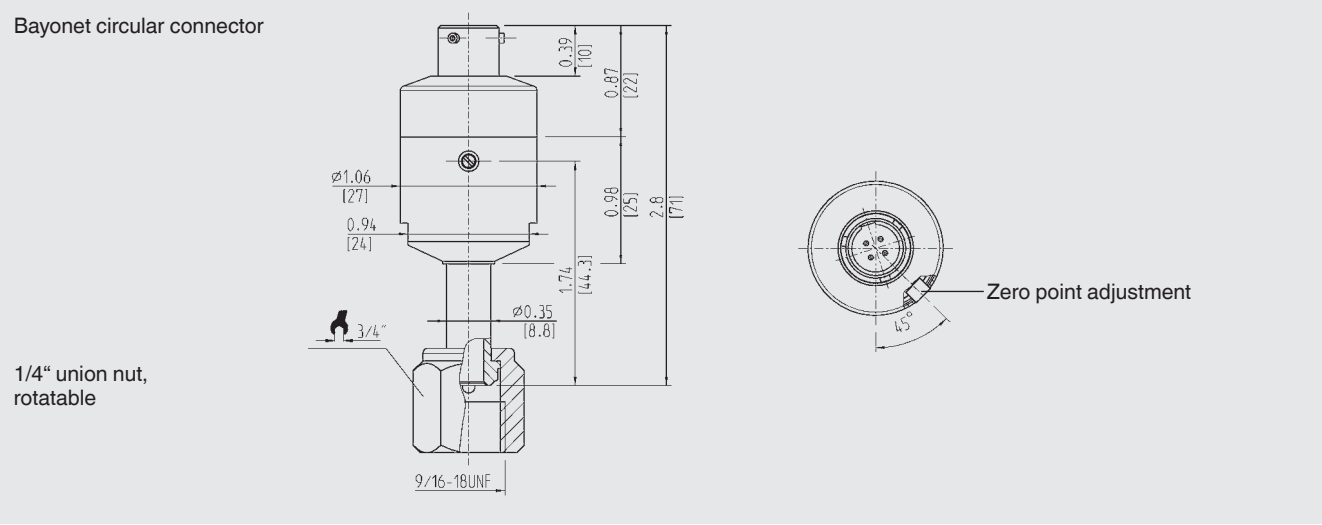


Process connections


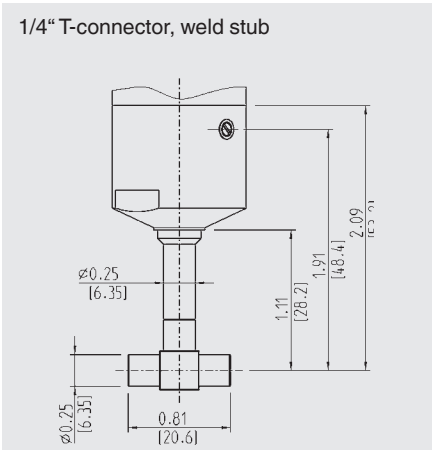
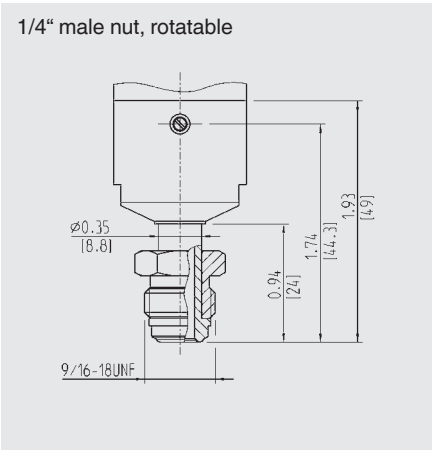
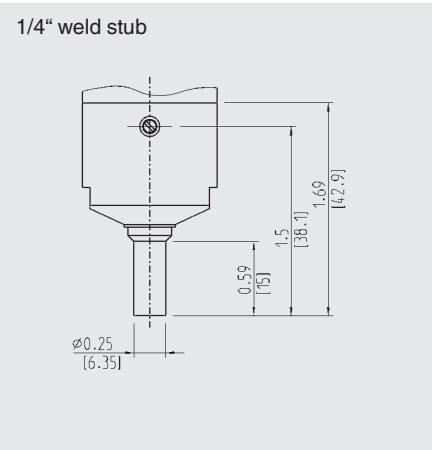


Dimensions in inch [mm] WUC-15

Electrical connections

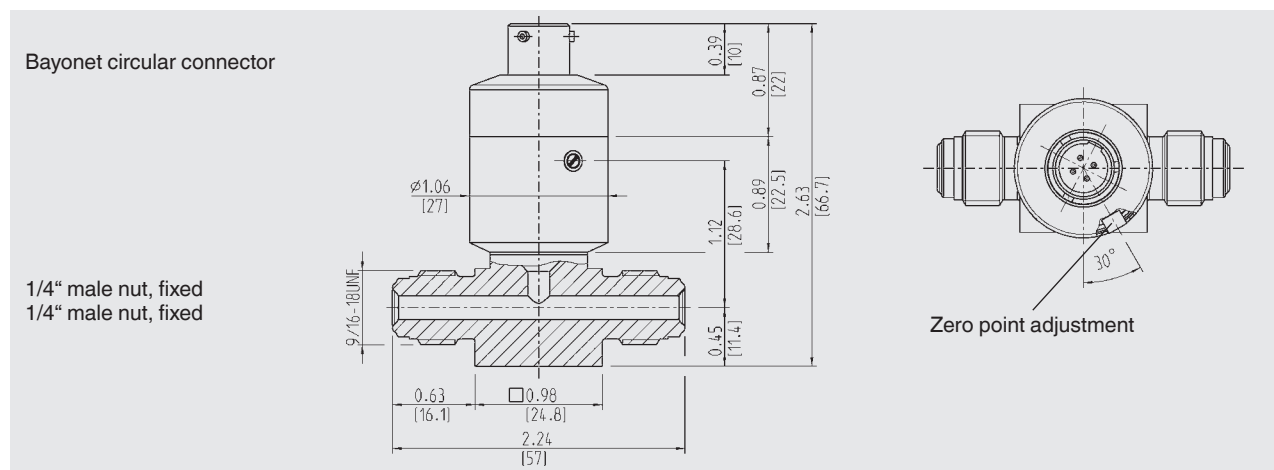


Process connections

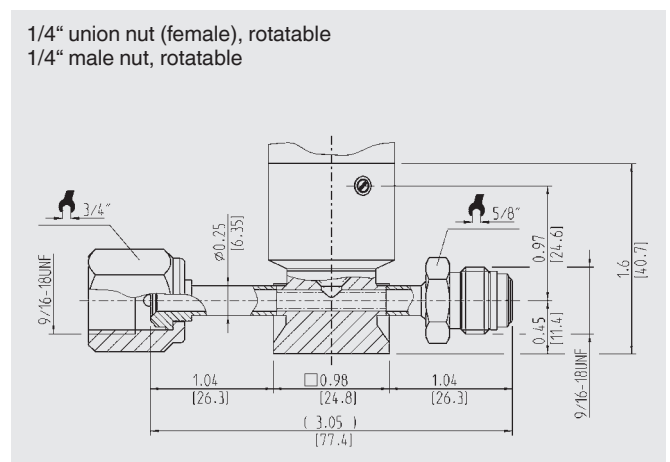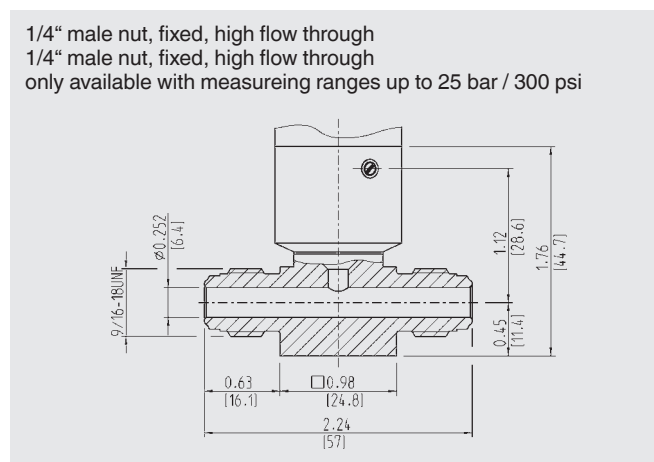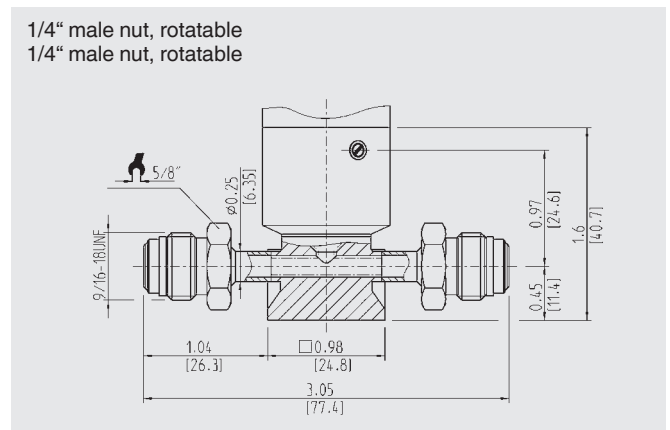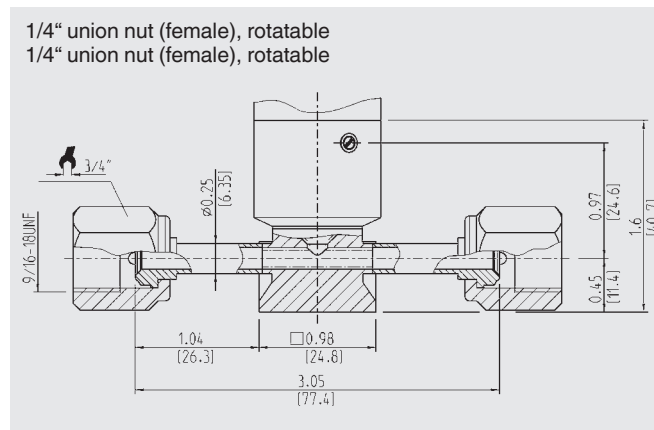


Process connections for WUC-15


1/4" male nut, fixed
1/4" union nut (female), rotatable

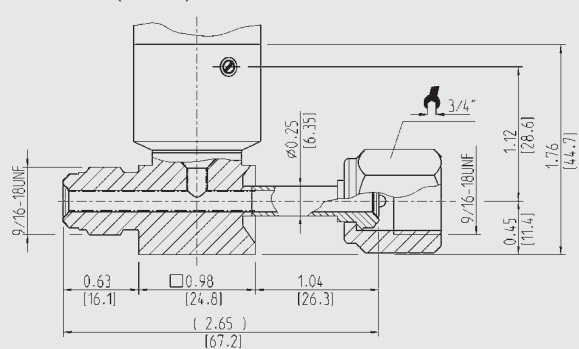


1/4" male nut, fixed
1/4" male nut, rotatable

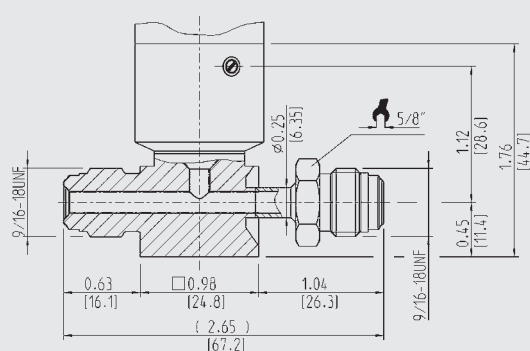

1/4" male nut, fixed
1/4" weld stub

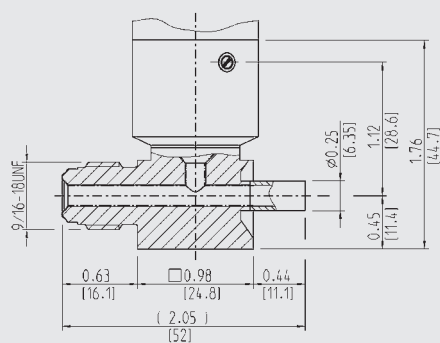

1/4" weld stub
1/4" weld stub


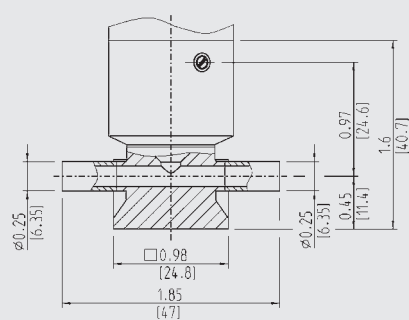


Dimensions in inch [mm] WUC-16

Electrical connections

Bayonet circular connector


MSM W 1 1/2"

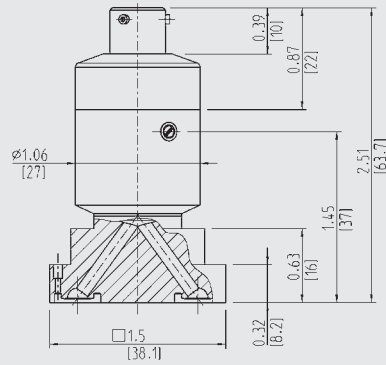

Zero point adjustment


Process connections

MSM C 1 1/2"

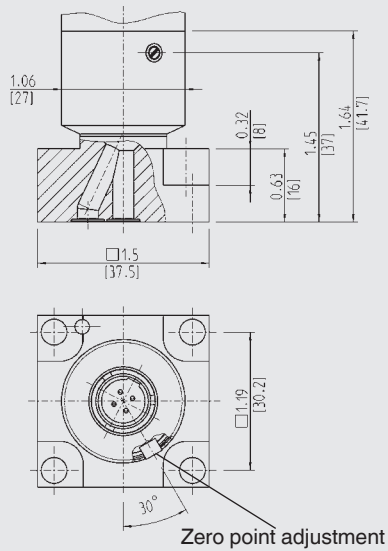


Zero point adjustment

MSM C 1 1/8"

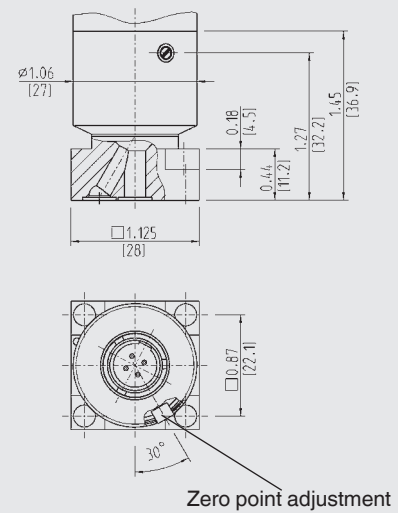

Zero point adjustment

Connector orientation for the mounting of attachable indicators

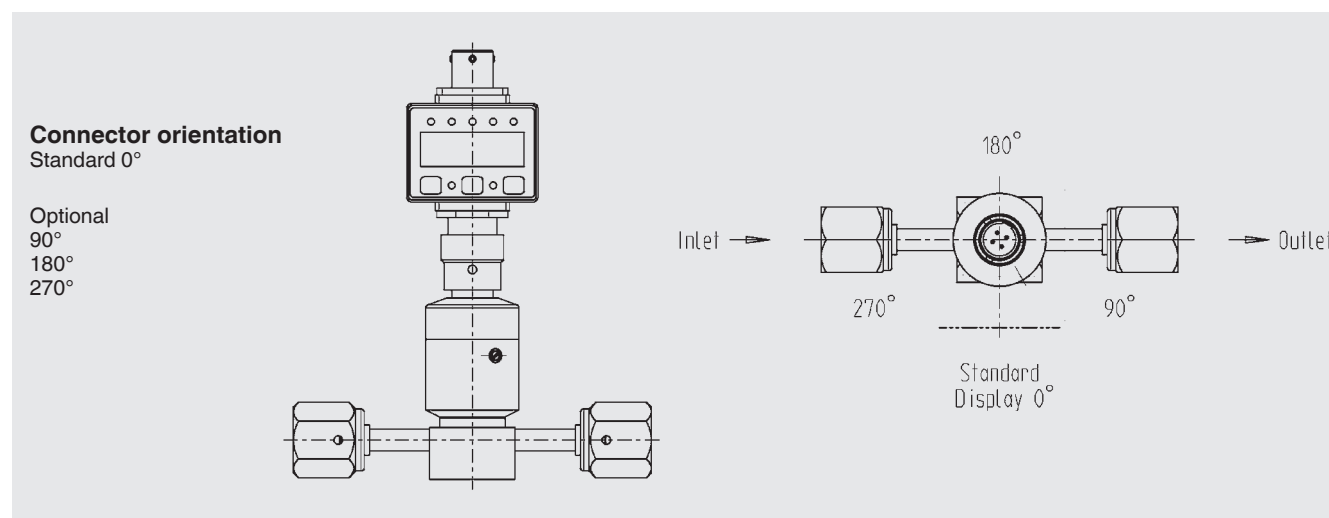

Accessories

Attachable indicator with LED (N)WUR-1

- 4-digit display
- Ingress protection IP 65
- Accuracy: $\leq 0.5\% \pm 1$ digit
- Up to 2 switching outputs configurable
- 5 different pressure units adjustable



Front view



Top view

Order numbers			Model WUR-1		Model NWUR-1 (Ex n)	
Input	Output	Signal	Front view	Top view	Front view	Top view
M12 x 1	M12 x 1	4 ... 20 mA, 2-wire	7043425	7330752	7238163	7216461
M12 x 1	M12 x 1	DC 0.1 ... 10.1 V, 3-wire	7717683	7495459	-	-
M12 x 1	M12 x 1	DC 0.1 ... 5.1 V, 3-wire	7717594	7717488	-	-
Bayonet	Bayonet	4 ... 20 mA, 2-wire	7291390	7196444	7284122	7284300
Bayonet	Bayonet	DC 0.1 ... 10.1 V, 3-wire	7718736	7718689	-	-
Bayonet	Bayonet	DC 0.1 ... 5.1 V, 3-wire	7718701	7718671	-	-
Bayonet	Cable	4 ... 20 mA, 2-wire	7005299	7005311	-	-

© 2009 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.



WIKAL Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. (+49) 9372/132-0
Fax (+49) 9372/132-406
E-mail info@wika.de
www.wika.de