

EUFLON™

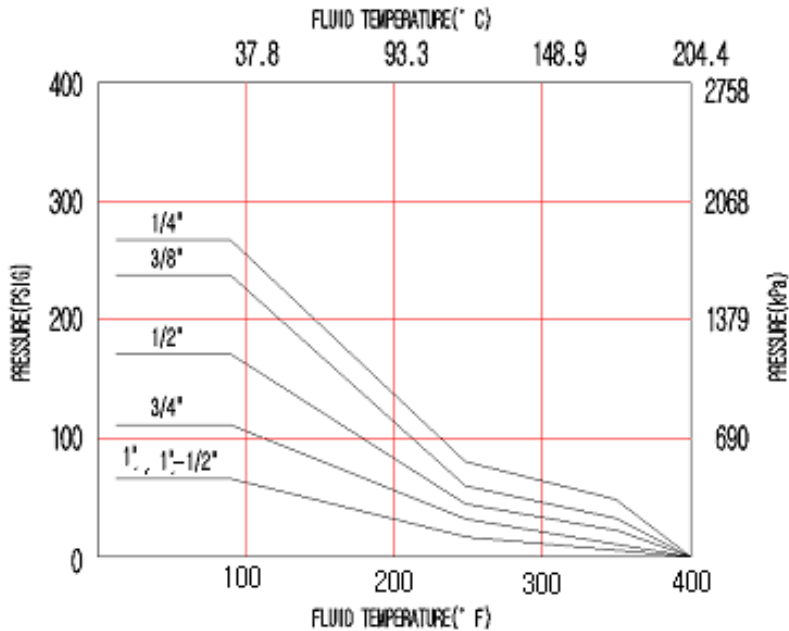
FITTINGS, TUBING & PIPINGS



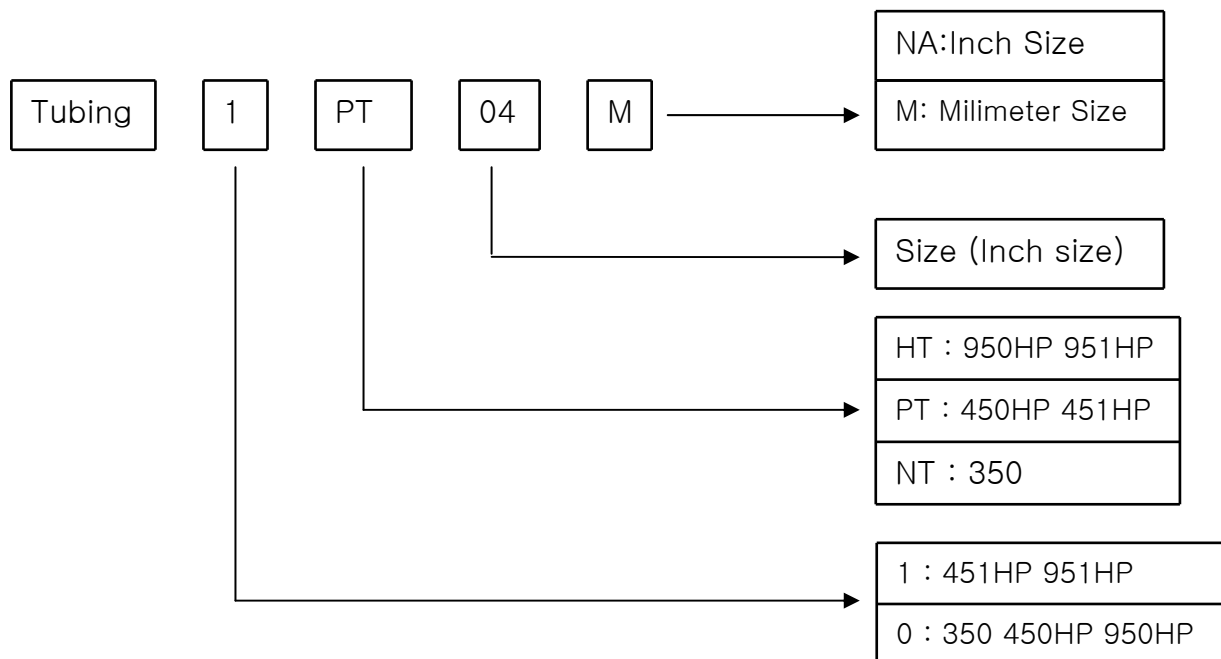
EUFLON™**PFA TUBING**

Ordering Number	Nominal Size	O.D	O.D Tolerance	I.D	Wall Thickness	Wall THK. Tolerance
T-02	1/8"	3.18mm	±0.076mm	1.65mm	0.76mm	±0.102mm
T-04-01	1/4"	6.35mm	±0.102mm	3.96mm	1.19mm	±0.102mm
T-04-02	1/4"	6.35mm	±0.102mm	4.35mm	1.00mm	±0.102mm
T-06	3/8"	9.53mm	±0.102mm	6.38mm	1.57mm	±0.102mm
T-08	1/2"	12.70mm	±0.127mm	9.55mm	1.57mm	±0.127mm
T-12	3/4"	19.05mm	±0.127mm	15.90mm	1.57mm	±0.127mm
T-16	1"	25.40mm	±0.127mm	22.25mm	1.57mm	±0.127mm
T-24	1-1/2"	38.10mm	±0.20mm	33.73mm	2.18mm	±0.20mm

Ordering Number	Nominal Size	O.D	O.D Tolerance	I.D	Wall Thickness	Wall THK. Tolerance
T-04M	4mm	4mm	±0.10mm	3mm	0.5mm	±0.10mm
T-06M	6mm	6mm	±0.10mm	4mm	1.0mm	±0.10mm
T-08M	8mm	10mm	±0.10mm	8mm	1.0mm	±0.10mm
T-12M	12mm	12mm	±0.15mm	9mm	1.5mm	±0.12mm
T-15M	15mm	15mm	±0.15mm	13mm	1.0mm	±0.12mm
T-16M	16mm	16mm	±0.15mm	14mm	1.0mm	±0.12mm
T-19M	19mm	19mm	±0.15mm	15mm	2.0mm	±0.15mm
T-21.7	21.7mm	21.7mm	±0.15mm	16.7mm	2.5mm	±0.20mm
T-25M	25mm	25mm	±0.15mm	22mm	1.5mm	±0.12mm
T-27M	27mm	27mm	±0.20mm	23mm	2.0mm	±0.15mm
T-28M	28mm	28mm	±0.20mm	23mm	2.5mm	±0.20mm
T-32M	32mm	32mm	±0.20mm	28mm	2.0mm	±0.15mm
T-38M	38mm	38mm	±0.20mm	34mm	2.0mm	±0.15mm
T-40M	40mm	40mm	±0.20mm	35.64mm	2.18mm	±0.12mm
T-48M	48mm	48mm	±0.20mm	43mm	2.5mm	±0.20mm
T-52M	52mm	52mm	±0.20mm	48mm	2.0mm	±0.15mm
T-54M	54mm	54mm	±0.20mm	49mm	2.5mm	±0.20mm
T-63M	63mm	63mm	±0.20mm	59mm	2.0mm	±0.15mm
T-65M	65mm	65mm	±0.20mm	61mm	2.0mm	±0.15mm

EUFLON™**PFA TUBINGS**

EFI Ultra pure PFA Tubing is made 100% virgin Teflon[®] PFA 950HP, 951HP, 451HP & 450HP to provide the lowest extractable metals, ions and fluorides, and this inner surface is more smooth than any other tubing. This tubes also has improving corrosion properties, reducing permeability to gases and liquids, and improving mechanical properties.

Ordering Number System

* Daikin 및 기타사의 raw material 로 고객의 요청 사항에 맞추어 제작 하여 드립니다.

* Retightening

All fittings connections assembled using the room temperature flaring technique
Should be retightened to the minimum nut torque values identified in Table 1.

Tubing Size	1/4"	3/8"	1/2"	3/4"	1"	1-1/2"
Minimum Nut Torque (kg.cm)	10	14	18	30	36	

(TABLE 1)

Ordering Number System

