
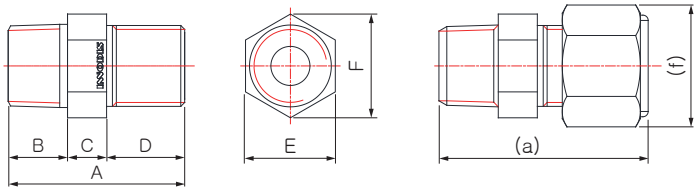


[PFA Fitting]

Male Connector

双层sealing构造，优良的密封力，比管更高的伸长强度，最大使用温度200℃的 PFA Fitting。
二重シーリング構造による優秀な密閉力，チューブより高い抗張力，最大使用温度200℃の PFA Fitting 。




Model Selection IMC – ①m/①i – R② – P1						Dimension									
IMC–	4	1/8	–	R1/8	–P1	4(1/8)	26	28	8	8	10	12	13.9	12.7	
				R1/4			31.5	39.9	11.5	10	10	15	17.3	18.5	
	6	1/4		R1/8		6 (1/4)	30.5	33.4	8	10	12.5	15	17.3	18.5	
							R1/4	34	35.9	11.5	10	12.5	15	17.3	18.5
				R3/8			35	40.1	12.5	10	12.5	15	17.3	18.5	
	8,10	3/8		R1/4			8,10 (3/8)	37	41.1	11.5	10	15.5	19	21.9	25.4
				R3/8				38	41.1	12.5	10	15.5	19	21.9	25.4
				R1/2		40.7		48.2	15.2	10	15.5	19	21.9	25.4	
				R3/4		45.2		52.3	19.7	10	15.5	19	21.9	25.4	
	12	1/2		R1/4		12 (1/2)		41.5	49.9	11.5	10	20	23	26.6	31.2
				R3/8			42.5	50.9	12.5	10	20	23	26.6	31.2	
				R1/2			45.2	53.6	15.2	10	20	23	26.6	31.2	
				R3/4			49.5	58	19.5	10	20	23	26.6	31.2	
	19	3/4		R3/8			19 (3/4)	49.5	80.5	12.5	10	27	32	37	43.7
				R1/2		52.2		66.5	15.2	10	27	32	37	43.7	
				R3/4		56.7		66.5	19.7	10	27	32	37	43.7	
	25	1		R1/2		25 (1)		60.7	73.2	15.2	15	30.5	44	50.8	57.8
				R3/4			65.2	77.5	19.7	15	30.5	44	50.8	57.8	
				R1			66.5	79	21	15	30.5	44	50.8	57.8	

[PFA Fitting]

Union Connector

双层sealing构造，优良的密封力，比管更高的伸长强度，最大使用温度200℃的 PFA Fitting。
二重シーリング構造による優秀な密閉力，チューブより高い抗張力，最大使用温度200℃の PFA Fitting 。

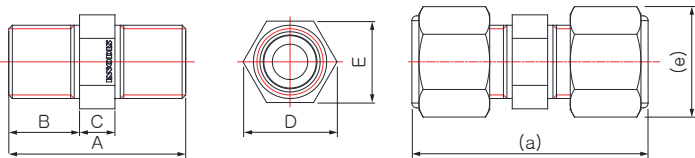


Model Selection IUC – ①m/①i – ①n/①i – P1							Dimension								
①Size(mm/inch)			Tube Size(mm/inch)				Tube Size(mm/inch)		A	(a)	B	C	D	E	(e)
IUC–	4	1/8	–		4	1/8	4 (1/8)	4 (1/8)	28	38	10	8	12	13.9	12.7
					6	1/4		6 (1/4)	32.5	46.8	12.5	10	15	17.3	18.5
	6	1/4			6	1/4	6 (1/4)	6 (1/4)	35	46.8	12.5	10	15	17.3	18.5
					8,10	3/8		8,10 (3/8)	38	48	15.5	10	19	21.9	25.4
	8,10	3/8			8,10	3/8	8,10 (3/8)	8,10 (3/8)	41	55.2	15.5	10	19	21.9	25.4
					12	1/2		12 (1/2)	45.5	61	20	10	23	26.6	31.2
	12	1/2			6	1/4	12 (1/2)	6 (1/4)	42.5	56.9	12.5	10	23	26.6	18.5
					12	1/2		12 (1/2)	50	66.8	20	10	23	26.6	31.2
					19	3/4		19 (3/4)	57	76.3	27	10	32	37	43.9
					8,10	3/8		8,10 (3/8)	52.5	70.7	15.5	10	32	37	25.4
	19	3/4			19	3/4	19 (3/4)	19 (3/4)	64	86	27	10	32	37	43.9
					12	1/2		12 (1/2)	65.5	86.4	20	15	44	50.8	31.2
	25	1			19	3/4	25 (1)	19 (3/4)	72.5	96	27	15	44	50.8	43.9
					25	1		25 (1)	76	101	30.5	15	44	50.8	57.8

[PFA Fitting]

Male Elbow

双层sealing构造，优良的密封力，比管更高的伸长强度，最大使用温度200℃的 PFA Fitting。
二重シーリング構造による優秀な密閉力，チューブより高い抗張力，最大使用温度200℃の PFA Fitting。


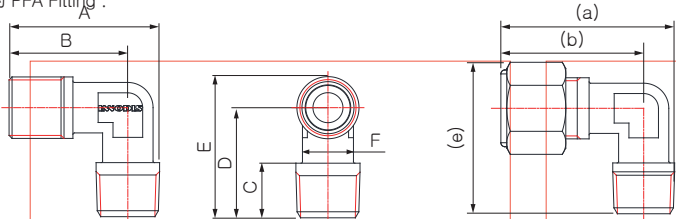


Model Selection IME – ①m/①i – R② – P1						Dimension										
①Size(mm, inch)				②PT		Tube Size(mm, inch)		A	(a)	B	(b)	C	D	E	(e)	F
IME–	4	1/8	–	R1/8	–P1	4 (1/8)		22.5	29	19	24.1	10.2	19.2	23.1	25.6	7
				R1/4				22.5	30.8	19	24.1	13.5	22.5	26.4	28.9	7
	6	1/4		R1/8		6 (1/4)		32	39	27	33	10.2	23.2	29.2	33.5	10
				R1/4				32	40	27	33	14	27	33	36.9	10
				R3/8				37.2	43.2	35.7	34.2	15.1	29.4	37.6	39.3	15
				R1/2				41	49	32.5	38.5	18.2	36.7	45.7	46.6	17
	8,10	3/8		R1/4		8,10 (3/8)		38.5	46.2	31	38.2	14	28.3	36.5	41.1	15
				R3/8				38.5	47.2	31	38.2	15.2	29.5	37.7	42.2	15
				R1/2				45.8	53	35.3	42.5	17.2	35.7	44.7	48.5	17
	12	1/2		R1/4		12 (1/2)		48.5	58	40	48.4	13.5	32	42.4	48	17
				R3/8				48.5	58	40	48.4	15	33.5	43.9	50	17
				R1/2				48.5	59	40	48.4	13.5	36.7	47.1	51.3	17
				R3/4				53.7	62	40	48.4	19.5	38.3	49.3	54	17
	19	3/4		R3/8		19 (3/4)		61.3	73.2	50	61	15.2	38.4	53.4	60.3	22.5
				R1/2				61.3	73.2	50	61	18.2	41.4	56.4	63.4	22.5
	25	1		R3/4		25 (1)		61.3	74.7	50	61	22.7	45.9	60.9	67.9	22.5
				R1/2				74.5	87.7	60	72.2	18.2	47.9	68.7	86.3	29
				R3/4				74.5	88	60	72.2	22.7	52.4	73.2	81.5	29
				R1				74.5	89.1	60	72.2	26	55.7	76.5	84.6	29

[PFA Fitting]

Union Elbow

双层sealing构造，优良的密封力，比管更高的伸长强度，最大使用温度200℃的 PFA Fitting。
二重シーリング構造による優秀な密閉力，チューブより高い抗張力，最大使用温度200℃の PFA Fitting。

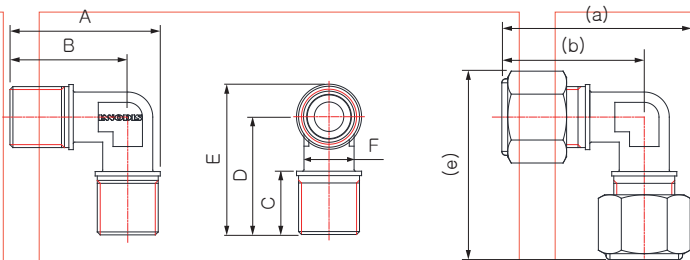


Model Selection IUE - ①m/①i - ①m/①i - P1						Dimension											
①Size(mm, inch)			Tube Size(mm, inch)			Tube Size(mm, inch)			A	(a)	B	(b)	C	D	E	(e)	F
IUE-	4	1/8	-	4	1/8	-P1	4 (1/8)	4 (1/8)	22.5	30.4	19	24.1	10	19	23.3	30.4	7
				6	1/4			6 (1/4)	29.5	37.9	23	28.1	14	27	32	39.3	10
	6	1/4		6 (1/4)	6 (1/4)	32	42.8	27	33	14	27	33.5	42.8	10			
					8,10	3/8	8,10 (3/8)	36.9	46.9	28.2	34.2	16.8	31	38.5	48	15	
	8,10	3/8		8,10 (3/8)	8,10 (3/8)	38.5	47.2	31	38.2	16.8	31	39.7	50.9	15			
					12	1/2	12 (1/2)	45.7	58	35.3	42.5	21.5	48.5	49	61.1	17	
	12	1/2		12 (1/2)	6 (1/4)	48.5	57.4	40	48.4	14	32.5	43.6	54.1	17			
					12 (1/2)	48.5	64	40	48.4	21.5	40	51.1	64	17			
					19 (3/4)	60.7	75.1	44.7	63.1	26.8	50	61.3	76.6	22.5			
					8,10 (3/8)	61.3	73.2	50	61	16.8	40	56	70	22.5			
	19	3/4		19 (3/4)	19 (3/4)	61.3	82.9	50	61	26.8	50	66	82.9	22.5			
					12 (1/2)	74.5	87.7	60	72.2	21.5	51.2	73	88.5	29			
	25	1		25 (1)	19 (3/4)	74.5	94.1	60	72.2	26.8	56.5	78.3	96.4	29			
					25 (1)	74.5	101	60	72.2	30.3	60	81.8	101	29			

PFA Fitting

[PFA Fitting]

Male TEE

双层sealing构造，优良的密封力，比管更高的伸长强度，最大使用温度200℃的 PFA Fitting。
二重シーリング構造による優秀な密閉力，チューブより高い抗張力，最大使用温度200℃の PFA Fitting 。

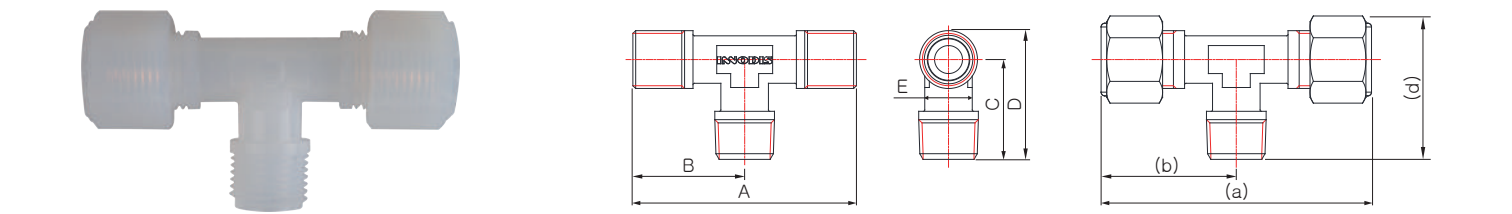


Model Selection						IMT – ①m/①i – R② – P1																	
①Size(mm, inch)						②PT						Dimension											
						Tube Size(mm, inch)		A		(a)		B		(b)		C		D		(d)		E	
IMT–	4	1/8	–	R1/8	–P1	4 (1/8)	38	48.2	19	24.1	19.2	23.1	25.6	7									
				R1/4			38	48.2	19	24.1	22.5	26.4	28.9	7									
	6	1/4		R1/8		6 (1/4)	54	66	27	33	23.2	29.2	33	10									
				R1/4			54	66	27	33	27	33	36.9	10									
				R3/8			54	66	27	33	27.4	33.4	37.5	10									
				R1/4			62	76.4	31	38.2	28.3	36.5	41	15									
	8,10	3/8		R3/8		8,10 (3/8)	62	76.4	31	38.2	29.5	37.7	42.2	18									
				R1/2			70.8	85	35.3	42.5	35.7	44.7	48.5	17									
				R1/4			80	96.8	40	48.4	32	42.4	48.1	17									
				R3/8			80	96.8	40	48.4	33.5	43.9	51.3	17									
	12	1/2		R1/2		12 (1/2)	80	96.8	40	48.4	35.7	46.1	51.3	17									
				R3/4			80	96.8	40	48.4	38.3	48.6	54	17									
				R3/8			100	122	50	61	38.4	53.9	67.9	22.5									
				R1/2			100	122	50	61	41.4	53.4	62.4	22.5									
	19	3/4		R3/4		19 (3/4)	100	122	50	61	45.9	56.4	67.9	22.5									
				R1/2			120	144.4	60	72.2	47.9	68.7	75.8	29									
				R3/4			120	144.4	60	72.2	52.4	73.2	85.3	29									
				R1			120	144.4	60	72.2	55.7	76.5	84.6	26									

[PFA Fitting]

Union TEE

双层sealing构造，优良的密封力，比管更高的伸长强度，最大使用温度200℃的 PFA Fitting。
二重シーリング構造による優秀な密閉力，チューブより高い抗張力，最大使用温度200℃の PFA Fitting 。


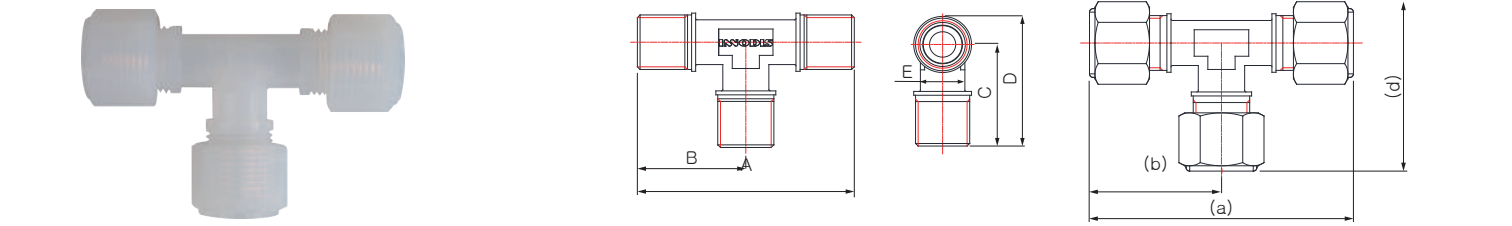


Model Selection						Dimension									
①Size(mm, inch)			Tube Size(mm, inch)			Tube Size(mm, inch)		A	(a)	B	(b)	C	D	(d)	E
IUT-	4	1/8	-	4	1/8	4 (1/8)	4 (1/8)	38	48.1	19	24.1	19	23.3	30.4	7
				6	1/4		6 (1/4)	47.2	57.4	23.6	28.7	27	32.5	39.4	10
	6	1/4		4	1/8	6 (1/4)	4 (1/8)	54	66	27	33	23	29	37.9	10
				6	1/4		6 (1/4)	54	66	27	33	27	33.5	36.9	10
				8,10	3/8		8,10 (3/8)	54	66	27	33	29.8	36.3	46.8	10
				6	1/4		6 (1/4)	62	76.4	31	38.2	27	35.2	46.9	10
	8,10	3/8		8,10	3/8	8,10 (3/8)	8,10 (3/8)	62	76.4	31	38.2	31	39.7	42.2	15
				12	1/2		12 (1/2)	70.6	85	35.3	42.5	40	49	61.1	17
				6	1/4		6 (1/4)	80	96.8	40	48.4	32.5	43.6	54.1	17
				8,10	3/8		8,10 (3/8)	71.4	88.2	35.7	44.1	31	42.1	53.7	15
	12	1/2		12	1/2	12 (1/2)	12 (1/2)	80	96.8	40	48.4	40	51.1	64	17
				19	3/4		19 (3/4)	89.4	106.2	44.7	53.1	50	62.3	76.6	22.5
				8,10	3/8		8,10 (3/8)	100	122	50	61	40	55	69.1	22.5
				12	1/2		12 (1/2)	100	122	50	61	44.7	60.7	75.1	22.5
	19	3/4		19	3/4	19 (3/4)	19 (3/4)	100	122	50	61	50	66	82.9	22.5
				12	1/2		12 (1/2)	120	144.4	60	72.2	51.2	73	88.5	29
				19	3/4		19 (3/4)	120	144.4	60	72.2	56.5	78.2	96.4	29
				25	1		25 (1)	120	144.4	60	72.2	60	81.8	85.3	29

[PFA Fitting]

Nut

INNODIS PFA Nut





Model Selection		IF – ①②	
①NUT	②Size		
N (Nut)	4m	(4mm)	18i (1/8inch)
	6m	(6mm)	14i (1/4inch)
	8m, 10m (8mm, 10mm)		38i (3/8inch)
	12m	(12mm)	12i (1/2inch)
	19m	(19mm)	34i (3/4inch)
	25m	(25mm)	1i (1inch)

Dimension			
Size		A	B
4mm	1/8inch	10	12.7
6mm	1/4inch	13	18.5
8mm, 10mm	3/8inch	18.5	25.4
12mm	1/2inch	22	31.2
19mm	3/4inch	27	43.9
25mm	1inch	34	57.7

[PFA Fitting]

Sleeve

INNODIS PFA Sleeve



Model Selection		IF – ①②	
①Sleeve	②Size		
S(Sleeve)	4m	(4mm)	18i (1/8inch)
	6m	(6mm)	14i (1/4inch)
	8m, 10m (8mm, 10mm)		38i (3/8inch)
	12m	(12mm)	12i (1/2inch)
	19m	(19mm)	34i (3/4inch)
	25m	(25mm)	1i (1inch)

Dimension		
Size		A
4mm	1/8inch	10
6mm	1/4inch	13.5
8mm, 10mm	3/8inch	16.9
12mm	1/2inch	21.6
19mm	3/4inch	28
25mm	1inch	33

PFA
Fitting