


[PTFE 加工]

Low-Priced Ball Valve

LCD 和半导体设备中用来控制药液(包含蒸馏水) 流动的 (ON, OFF) Low-Priced Ball Valve.

Low-Priced Ball Valve that control flowing of chemicals(distilled water inclusion) used in semiconductor LCD equipment.



半導体及びLCD 装置に使われる薬液(純水を含む)の流れをコントロールする(ON, OFF) Low-Priced Ball Valveです。

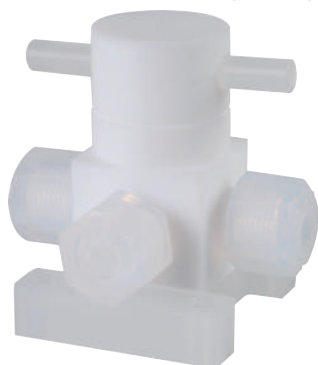

[3Way]





[Normal]

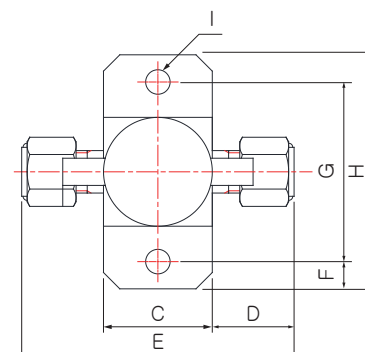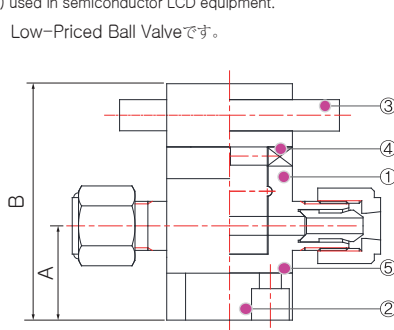

Dimension(基本型号)

Size	A	B	C	D	E	F	G	H	I
1/8"	15	37.6	20	14	48	5	33	43	2-Ø4.5
1/4"	19.5	54.6	27	17.5	60	5	35	45	4-Ø4.5
3/8"	24.5	64.5	42	21.2	84.4	7	50	64	2-Ø7

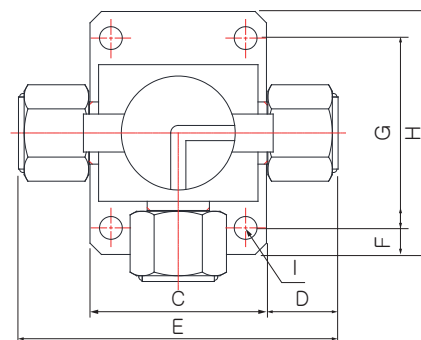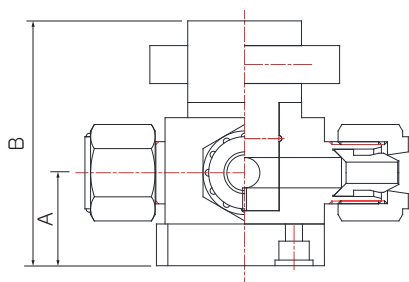

Specification

流体温度(Fluid Temp)(流体温度)	5~60℃
使用流体(Used Fluid)(使用流体)	Chemicals, D.I-Water
流体压力(Fluid Pressure)(流体压力)	0~3Kgf/cm ²
生产品目(Size)(生产品目)	1/8inch~3/8inch

Characteristics

- 耐化学性
- 保有最佳库存 和可以特殊配置
- Connection是INNODIS产品(IF series)
- 耐化学性
- 適正在庫の保有及び特殊仕様が可能
- Connectionはイノディスの製品です。(IF Series)

Dimension(3Way)

Size	A	B	C	D	E	F	G	H	I
1/8"	15	37.6	20	12.6	50.2	5	33	43	4-Ø4.5
1/4"	19.5	54.6	27	17.5	60	5	35	45	4-Ø4.5
3/8"	24.5	64.5	42	21.5	85	7	50	71.5	2-Ø6

No	Part	Materials
1	Stem	PTFE
2	Bottom Plate	PP
3	Handle	PP

No	Part	Materials
4	Pin	SUS 304
5	Body	PTFE

Model Selection

IVB① - ②③④⑤

①Type	②Size	③Material	④Connection	⑤O-ring
无记号 (Normal)	T (PTFE)	18 (1/8inch) or 3.4 (3.4mm)	I (Inch)	E (EPDM)
3 (3Way)		14 (1/4inch) or 6 (6mm)	M (mm)	F (FKM)
		38 (3/8inch) or 8,10 (8,10mm)	F (PT Female)	O (Other)